



- Low profile flexible leads
- Premium MICA insulation
- Stainless bands

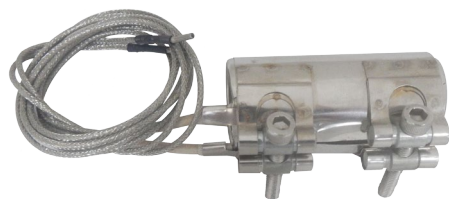


- Welded style made to order
- Other sizes made to order

Product Code	D	L	Watts
BH2525	25	25	125w
BH2538	25	38	150w
BH3030	30	30	150w
BH3040	30	40	180w
BH3075	30	75	300w
BH3225	32	25	115w
BH3232	32	32	150w
BH3238	32	38	180w
BH3250	32	50	250w
BH3275	32	75	300w
BH3538	35	38	200w
BH3838	38	38	200w
BH3850	38	50	300w
BH3875	38	75	400w
BH4030	40	30	200w
BH4038	40	38	220w
BH4060	40	60	300w
BH4090	40	90	350w
BH5038	50	38	250w
BH5050	50	50	400w
BH5075	50	75	600w
BH6060	60	60	275w

Premium Band Heaters

HEATERS AND THERMOCOUPLES

- Brass tubular sheath
- Tear-resistant connection of power cable



- Standard cable outlet: Axial 45°
- Special sizes to order

Product Code	D	L	Watts
PRMX-2525	25	25	85w
PRMX-2535	25	35	125w
PRMX-3030	30	30	160w
PRMX-3040	30	40	165w
PRMX-3238	32	38	195w
PRMX-3540	35	40	195w
PRMX-3838	38	38	215w
PRMX-3850	38	50	300w
PRMX-4030	40	30	160w
PRMX-4040	40	40	225w
PRMX-4060	40	60	305w
PRMX-5050	50	50	350w
PRMX-6060	60	60	505w