


Machined to suit your application.  
 Polyester glass laminate.  
 Low thermal conductivity continuous to 220°C.  
 0.8 - 50mm thick available.




Sintered Vents

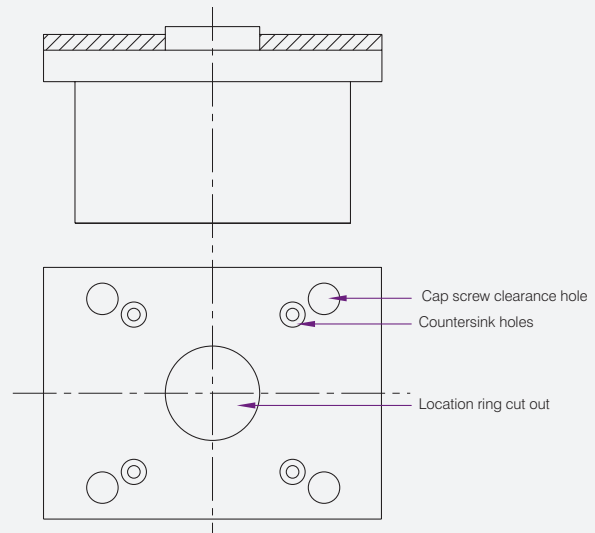


Blowmould, Diecast and Injection Moulding

Used for Blow Moulding, Diecasting or Vacuum Casting  
 Pore Diameter: 0.30mm

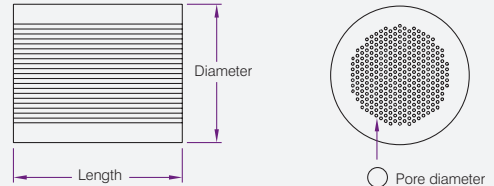

	Product Code									
	SV30510	SV30610	SV30615	SV30810	SV30815	SV31010	SV31015	SV31210	SV31215	SV31415
<b>Diameter</b>	5	6	6	8	8	10	10	12	12	14
<b>No. of Pores</b>	89	89	89	200	200	340	340	340	340	550
<b>Length</b>	10	10	15	10	15	10	15	10	15	15

Used for Plastic Injection Moulding  
 Pore Diameter: 0.03 ~ 0.10mm

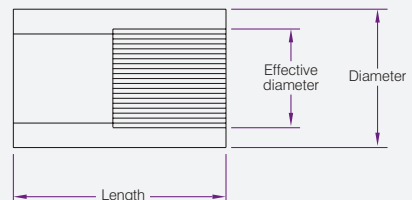

	Product Code									
	030410	030610	030810	031010	050610	050810	051010	100810	101010	
<b>Outer Dia.</b>	4	6	8	10	6	8	10	8	10	
<b>Effective Dia.</b>	2.5	2.5	2.5	2.5	3.5	3.5	3.5	5.5	5.5	
<b>No. of Pores</b>	606	606	606	606	804	804	804	780	780	
<b>Length</b>	10	10	10	10	10	10	10	10	10	