




Material: SAE52100
Hardness: 60+2RC
 Induction Heat Treated
 *Tolerance on the "P" Dimensions is -.5 mm

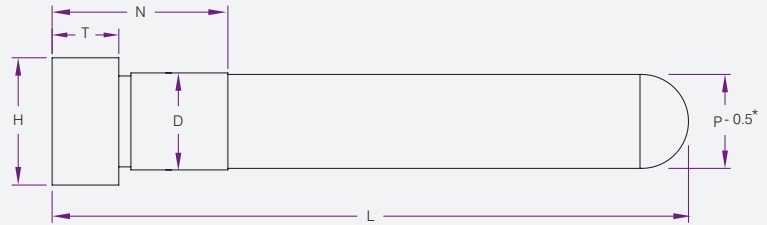

Product Code	P	L	N	T	H	D
MAP12060	12	60	23	10	17	+.012 +.001
MAP12140	12	140	33	10	17	
MAP16080	16	80	28	12	21	
MAP16100	16	100	28	12	21	
MAP16120	16	120	28	12	21	
MAP16140	16	140	33	12	21	
MAP16160	16	160	33	12	21	
MAP16180	16	180	38	12	21	
MAP20080	20	80	32	15	25	
MAP20100	20	100	32	15	25	
MAP20120	20	120	32	15	25	
MAP20140	20	140	37	15	25	
MAP20160	20	160	37	15	25	
MAP20200	20	200	42	15	25	
MAP20220	20	220	42	15	25	
MAP25100	25	100	47	15	30	
MAP25120	25	120	47	15	30	
MAP25140	25	140	47	15	30	
MAP25160	25	160	52	15	30	
MAP25180	25	180	52	15	30	
MAP25200	25	200	52	15	30	
MAP25260	25	260	57	15	30	
MAP25300	25	300	57	15	30	
MAP30160	30	160	50	20	35	
MAP30180	30	180	50	20	35	
MAP30200	30	200	50	20	35	
MAP30260	30	260	60	20	35	
MAP30280	30	280	60	20	35	
MAP30300	30	300	60	20	35	