

Materials: INOX. 1.4034
Hardness: 51 ± 3 HRC.
Max. working temp 150°C Patented System


Inner insert is always at the same level as the body of the date stamp.
Wide range of diameters. Only a H7 pocket required for assembly.
No downtime when changing inserts. Internal mechanism guarantees
secure replacement of inserts.



12 Months	12 Month + Year	Year	Blank	A	C	D	E	L	N
FA0422SF	FA042212-...	FA042204-...	FA042200	4	2.2	6	3.5	12	4
FA0530SF	FA053012-...	FA053004-...	FA053000	5	3	6	3.5	12	4
FA0632SF	FA063212-...	FA063205-...	FA063200	6	3.2	12	4	20	5
FA0847SF	FA084712-...	FA084705-...	FA084700	8	4.7	12	6	20	5
FA1057SF	FA105712-...	FA105706-...	FA105700	10	5.7	12	8	20	6
FA1267SF	FA126712-...	FA126708-...	FA126700	12	6.7	12	10	20	8
FA1687SF	FA168712-...	FA168710-...	FA168700	16	8.7	12	12	20	10
FA2007SF	FA200712-...	FA200710-...	FA200700	20	10.7	12	14	20	10

DATE STAMPS


Date Stamp Inserts

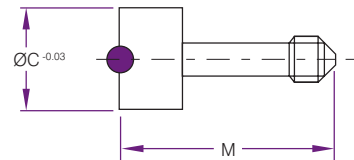

Material: INOX. 1.4034
Hardness: 51 ± 3 HRC.



IMPORTANT
When replacing the insert, be sure to tighten until hearing the engagement "click".

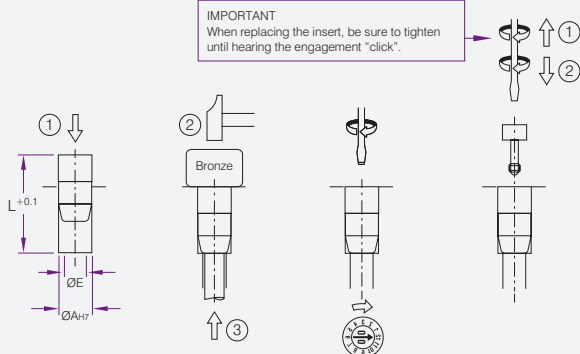

Year and Arrow

Product Code	C	M
IA2275 ..	2.2	7.5
IA3075 ..	3	7.5
IA3217 ..	3.2	17
IA4717 ..	4.7	17
IA5717 ..	5.7	17
IA6717 ..	6.7	17
IA8717 ..	8.7	17
IA1007 ..	10.7	17

Arrow Only


Product Code	C	M
IA2275SF	2.2	7.5
IA3075SF	3	7.5
IA3217SF	3.2	17
IA4717SF	4.7	17
IA5717SF	5.7	17
IA6717SF	6.7	17
IA8717SF	8.7	17
IA1007SF	10.7	17



Materials: Stainless Steel

Hardness: 50-55 HRC.

Outer Insert

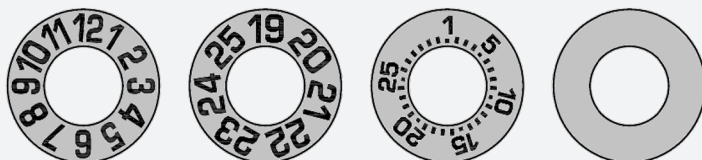


Inner Insert




ØD	Product Code	Product Code	Product Code	Product Code
4	CCM04	CCA0420AA	CCG04*	CCN04
5	CCM05	CCA0520AA	CCG05*	CCN05
6	CCM06	CCA0620AA	CCG06	CCN06
8	CCM08	CCA0820AA	CCG08	CCN08
10	CCM10	CCA1020AA	CCG10	CCN10
12	CCM12	CCA1220AA	CCG12	CCN12
16	CCM16	CCA1620AA	CCG16	CCN16
20	CCM20	CCA2020AA	CCG20	CCN20

ØD	Product Code	Product Code
4	ICA0420AA	ICN04
5	ICA0620AA**	ICN06**
6	ICA0620AA	ICN06
8	ICA0820AA	ICN08
10	ICA1020AA	ICN10
12	ICA1220AA	ICN12
16	ICA1620AA	ICN16
20	ICA2020AA	ICN20


Installation

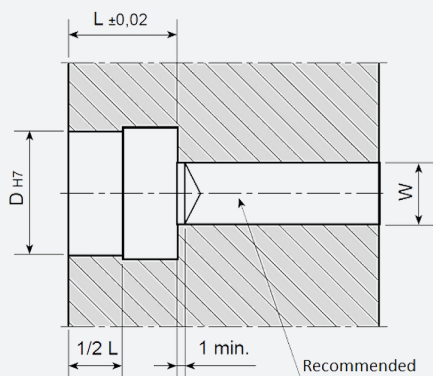

Outer Insert



Inner Insert



ØD	L	S	ØW	A	ØC	F
4	8***	0.25	1.4	2	2.2	M1X0.25
5	8	0.20	2	2	3.1	M1.6X0.2
6	8	0.20	2	2	3.1	M1.6X0.2
8	10	0.25	3	2.5	4.4	M2.3X0.25
10	12	0.35	3	3	5.2	M2.5X0.35
12	14	0.35	4	3	6.2	M3X0.35
16	14	0.35	5	3.5	8.2	M4X0.35
20	16	0.35	5	4.5	11	M4X0.35

* CCG04 & CCG05 have numbers only.



** Inner insert dia.6 valid also for outer insert dia. 5.

*** Special date stamps with D=4mm and L=5mm and inner insert with C=2.1 available on request.





Materials: INOX. 1.4034
 Hardness: 51 ± 3 HRC.
 Maximum working temperature 100°C .
 Patented System

Replaces the need for 2 separate date stamps. No need to machine 2 separate holes. Minimum space required for installation.

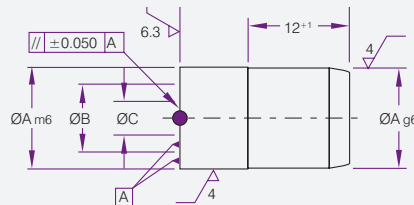

12 Month. + Yr	Blank	A	B	C	E	N
FD080512-..	FD080500	8	5.5	3	6	5
FD120812-..	FD120800	12	8	4	10	6
FD161012-..	FD161000	16	10.5	5.3	12	10



A = Diameter/Tolerance = $+.00$
 $-.02$

B = Length/Tolerance = $\pm .03$

DIA	A	B
DY-08	Dia 8.00	10.00
DY-10	Dia 10.00	10.00
DY-12	Dia 12.00	12.00
DY-16	Dia 16.00	14.00

DIA	A	B
DM-08	Dia 8.00	10.00
DM-10	Dia 10.00	10.00
DM-12	Dia 12.00	12.00
DM-16	Dia 16.00	14.00





Materials: INOX. 1.4034

Hardness: 51 ± HRC.

Assembly is from the front of the mould

► Cad Insertion Point

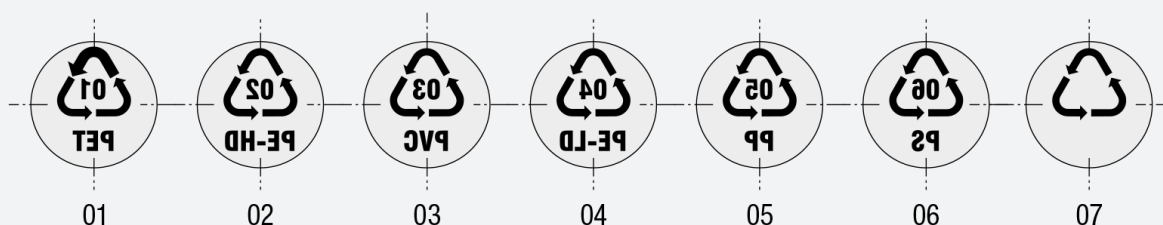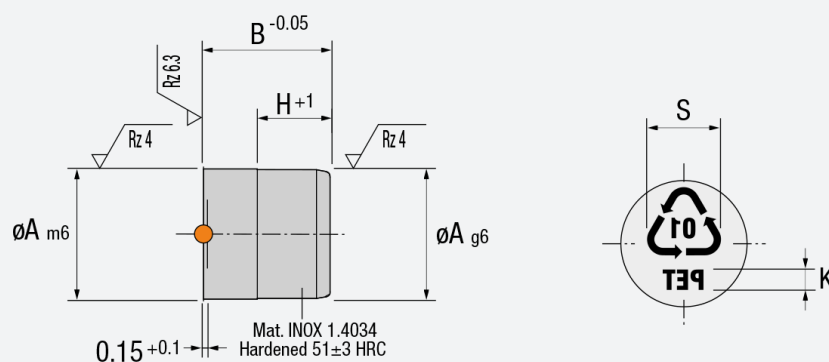

Product Code	A	B	E	H	K	S
IR1012-**-	10	12	8	7	1.5	5.6
IR1212-**-	12	12	10	7	1.8	6.8
IR1616-**-	16	16	12	9	2.4	9
IR2016-**-	20	16	16	9	3.2	11.5

**Indicate model number after the product code