



Light smooth action.

Helical design of cage and plunger design allows cage to freely rotate over the entire peripheral surface.


Lubrication problems are almost entirely eliminated.
Perfect precision alignment.

M: Movable range of stopper

Please Note: 60 Dia has fixed stopper

When assembling, two dowel pins are to be fitted in guide bush and holder.

Please note: dowels and screws are included in assembly

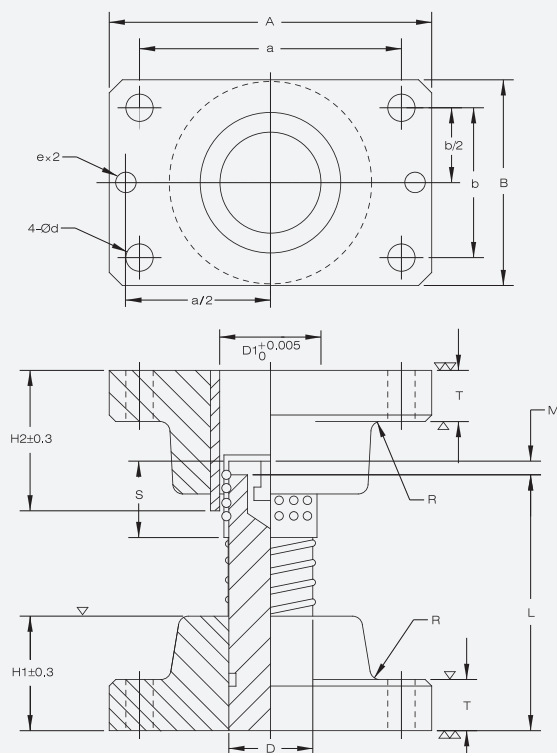

Product Code	øD	L	D1	A	B	a	b	d	H1	H2	T	S	M	e=H7	H7	screw 8pcs	dowel 4pcs
PSRBB25-120	25	120	31	84	48	66	30	9	30	50	20	50	0 - 20	8	$+0.015_0$	8ø - 35	8ø - 30
PSRBB25-140		140															
PSRBB25-160		160															
PSRBB25-180		180															
PSRBB32-120	32	120	40	100	58	76	36	11	40	60	20	60	0 - 25	8	$+0.015_0$	10ø - 45	8ø - 30
PSRBB32-140		140															
PSRBB32-160		160															
PSRBB32-180		180															
PSRBB38-160	38	160	48	130	75	100	44	11	50	70	25	70	0 - 29	10	$+0.015_0$	10ø - 45	10ø - 40
PSRBB38-180		180															
PSRBB38-200		200															
PSRBB38-240		240															
PSRBB50-180	50	180	60	155	90	125	60	14	65	90	25	90	0 - 42	10	$+0.015_0$	12ø - 50	10ø - 40
PSRBB50-200		200															
PSRBB50-240		240															
PSRBB50-260		260															
PSRBB50-300		300															
PSRBB60-200	60	200	70	190	120	150	80	18	75	100	30	100	0 - 59	13	$+0.018_0$	16ø - 60	13ø - 50
PSRBB60-240		240															
PSRBB60-260		260															
PSRBB60-300		300															