



Silicone Chrome Die Springs  
Raymond

Extra Heavy Duty  
Colour - GREEN

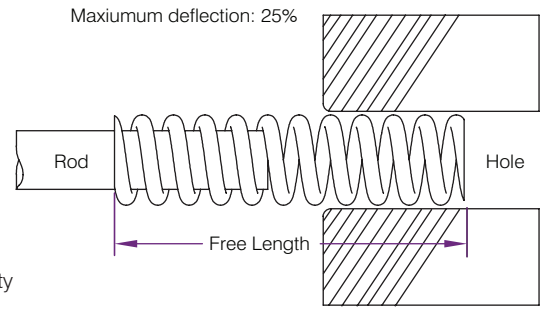


Hole Dia.	Rod Dia.	Product Code	Free Length		lb at 1/10" Defl	Maximum Deflection 25% of Free Length		Deflection for Average life 20% of Free Length		Deflection for Long life 15% of Free Length		Total Travel to Solid	
			mm	in.		Pressure Pounds	Length of Defl.	Pressure Pounds	Length of Defl.	Pressure Pounds	Length of Defl.	Pressure Pounds	Length of Defl.
3/8 10mm	3/16 4.5mm	DRX0308	25	1	22	55	0.250	44	0.200	33	0.150	56	0.275
		DRX0310	32	1.25	17	53.2	0.312	43	0.250	32	0.187	54	0.350
		DRX0312	38	1.5	14.5	54.4	0.375	43	0.300	32	0.225	57	0.440
		DRX0314	44	1.75	11.5	50.4	0.437	39	0.350	29	0.262	55	0.480
		DRX0316	51	2	10	50	0.500	40	0.400	30	0.300	54	0.600
		DRX0320	64	2.5	8	50	0.625	40	0.500	30	0.375	55	0.770
		DRX0324	76	3	6.5	48.8	0.750	39	0.600	29	0.450	55	0.920
		DRX0396	305	12	1.5	45	3.000	36	2.400	27	1.800	58	3.850
1/2 13mm	9/32 7mm	DRX0408	25	1	32	80	0.250	64	0.200	48	0.150	103	0.295
		DRX0410	32	1.25	24	75.1	0.312	60	0.250	45	0.187	97	0.360
		DRX0412	38	1.5	20	75	0.375	60	0.300	45	0.225	103	0.470
		DRX0414	44	1.75	17	74.5	0.437	60	0.350	45	0.262	99	0.530
		DRX0416	51	2	14	70	0.500	56	0.400	42	0.300	126	0.680
		DRX0420	64	2.5	11.5	71.9	0.625	56	0.500	42	0.375	102	0.800
5/8 16mm	11/32 8.5mm	DRX0424	76	3	9	67.5	0.750	54	0.600	41	0.450	102	0.980
		DRX0508	25	1	63	157.5	0.250	126	0.200	95	0.150	208	0.280
		DRX0510	32	1.25	47	147.1	0.312	117	0.250	88	0.187	187	0.340
		DRX0512	38	1.5	38	142.5	0.375	114	0.300	86	0.225	184	0.420
		DRX0514	44	1.75	32	140.2	0.437	112	0.350	84	0.262	181	0.490
		DRX0516	51	2	29	145	0.500	116	0.400	87	0.300	180	0.560
3/4 19mm	3/8 9.5mm	DRX0520	64	2.5	22	137.5	0.625	110	0.500	83	0.375	195	0.780
		DRX0524	76	3	18	135	0.750	108	0.600	81	0.450	200	0.980
		DRX0608	25	1	140	350	0.250	280	0.200	210	0.150	335	0.215
		DRX0610	32	1.25	110	344.3	0.312	275	0.250	206	0.187	340	0.300
		DRX0612	38	1.5	89	333.8	0.375	268	0.300	200	0.225	420	0.460
		DRX0614	44	1.75	75	328.5	0.437	264	0.350	198	0.262	350	0.460
		DRX0616	51	2	63.5	317.5	0.500	254	0.400	190	0.300	330	0.510
		DRX0620	64	2.5	50	312.5	0.625	250	0.500	188	0.375	355	0.710
1 26mm	1/2 12.5mm	DRX0624	76	3	40.5	303.7	0.750	243	0.600	182	0.450	345	0.840
		DRX0628	89	3.5	34.5	301.9	0.875	242	0.700	181	0.525	360	1.040
		DRX0632	102	4	30	300	1.000	240	0.800	180	0.600	360	1.200
		DRX0648	152	6	19.5	292.5	1.500	234	1.200	176	0.900	380	1.850
		DRX0812	38	1.5	184.8	693	0.375	555	0.300	416	0.225	632	0.342
		DRX0816	51	2	116	580	0.500	464	0.400	348	0.300	567	0.489
		DRX0820	64	2.5	89.6	560	0.625	448	0.500	336	0.375	571	0.637
		DRX0824	76	3	73.6	552	0.750	442	0.600	331	0.450	615	0.835
Wire 0.188 x 0.225	DRX0828	89	3.5	62.4	546	0.875	437	0.700	328	0.525	613	0.982	
	DRX0832	102	4	55.2	552	1.000	442	0.800	331	0.600	651	1.180	
	DRX0840	127	5	43.2	540	1.375	432	1.000	324	0.750	659	1.526	
	DRX0848	152	6	36	540	1.500	432	1.200	324	0.900	674	1.871	

Continues next page.

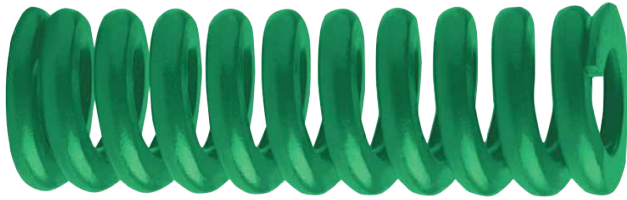

Silicone Chrome Die Springs  
Raymond

Extra Heavy Duty  
Colour - GREEN

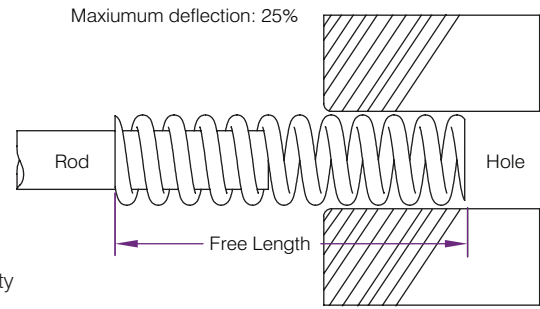

Hole Dia.	Rod Dia.	Product Code	Free Length		lb at 1/10" Defl	Maximum Deflection 25% of Free Length		Deflection for Average life 20% of Free Length		Deflection for Long life 15% of Free Length		Total Travel to Solid	
			mm	in.		Pressure Pounds	Length of Defl.	Pressure Pounds	Length of Defl.	Pressure Pounds	Length of Defl.	Pressure Pounds	Length of Defl.
1 1/4 32mm	5/8 15.5mm	DRX1016	51	2	192	960	0.500	768	0.400	577	0.300	1002	0.522
		DRX1020	64	2.5	144	900	0.625	720	0.500	540	0.375	1045	0.726
		DRX1024	76	3	118.4	888	0.750	710	0.600	533	0.450	1102	0.931
		DRX1028	89	3.5	100.8	882	0.875	706	0.700	530	0.525	1144	1.135
		DRX1032	102	4	84	840	1.000	673	0.800	505	0.600	1075	1.280
		DRX1036	115	4.5	78.4	882	1.125	706	0.900	529	0.675	1164	1.485
		DRX1040	127	5	68	850	1.375	680	1.000	510	0.750	1149	1.689
		DRX1048	152	6	56	840	1.500	672	1.200	504	0.900	1142	2.039
1 1/2 38mm	3/4 19mm	DRX1216	51	2	376	1880	0.500	1505	0.400	1128	0.300	1950	0.495
		DRX1220	64	2.5	294.4	1840	0.625	1472	0.500	1104	0.375	1840	0.625
		DRX1224	76	3	231.2	1734	0.750	1387	0.600	1040	0.450	1896	0.820
		DRX1228	89	3.5	196	1715	0.875	1372	0.700	1029	0.525	1911	0.975
		DRX1232	102	4	171.2	1712	1.000	1370	0.800	1027	0.600	2001	1.169
		DRX1236	115	4.5	148	1665	1.125	1332	0.900	999	0.675	2017	1.363
		DRX1240	127	5	136	1700	1.375	1360	1.000	1020	0.750	2118	1.557
		DRX1248	152	6	110.4	1656	1.500	1325	1.200	994	0.900	2147	1.945
2 51mm	1 25mm	DRX1264	203	8	80.8	1616	2.000	1293	1.600	970	1.200	2199	2.721
		DRX1620	64	2.5	381.6	2385	0.625	1908	0.500	1431	0.375	2851	0.747
		DRX1624	76	3	312	2340	0.750	1872	0.600	1404	0.450	2702	0.866
		DRX1628	89	3.5	254.4	2226	0.875	1781	0.700	1336	0.525	2310	0.908
		DRX1632	102	4	220	2200	1.000	1760	0.800	1320	0.600	2691	1.223
		DRX1636	115	4.5	188.8	2124	1.125	1700	0.900	1274	0.675	2622	1.389
		DRX1640	127	5	172.8	2164	1.250	1728	1.000	1296	0.750	2428	1.405
		DRX1648	152	6	141.6	2124	1.500	1700	1.200	1275	0.900	2280	1.610
		DRX1664	203	8	100	2000	2.000	1600	1.600	1200	1.200	2234	2.234
		DRX1680	254	10	84	2100	2.500	1680	2.000	1260	1.500	2448	2.914
DRX1696	305	12	71.2	2136	3.000	1710	2.410	1282	1.800	3184	4.472		