




Preloaded for high precision applications.

- Captive ball cage.
- Recommended for high-speed operations.
- Flanged mounting
- Spiro-helical ball pattern for extended life.

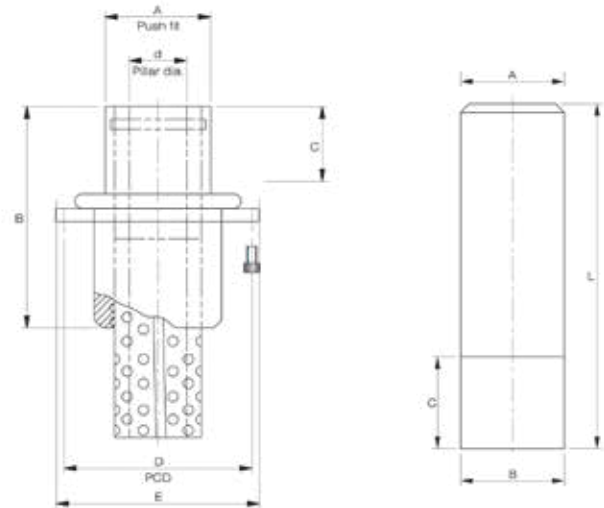

Product Code	d	A	B	C	D	E
EXBB 0.750	0.75	1.125	2.937	0.937	2	2.375
EXBB 1.00	1	1.5	3.437	1.218	2.312	2.687
EXBB 1.25-S	1.25	1.75	3.937	1.218	2.656	3
EXBB 1.250	1.25	1.75	3.937	1.687	2.656	3
EXBB 1.500	1.5	2	4.187	1.875	2.968	3.437

Product Code	A	B	C	L
EXP0.75 X 5.5	0.75	0.7355	1.25	5.5
EXP1 X 6	1	0.9855	1.5	6
EXP1 X 6.5	1	0.9855	1.5	6.5
EXP1 X 7.5	1	0.9855	1.5	7.5
EXP1.25 X 6	1.25	1.2355	2	6
EXP1.25 X 6.5	1.25	1.2355	2	6.5
EXP1.25 X 7.5	1.25	1.2355	2	7.5
EXP1.25 X 8.5	1.25	1.2355	2	8.5
EXP1.50 X 7.5	1.5	1.4855	2	7.5
EXP1.50 X 8.5	1.5	1.4855	2	8.5
EXP1.50 X 9.5	1.5	1.4855	2	9.5