


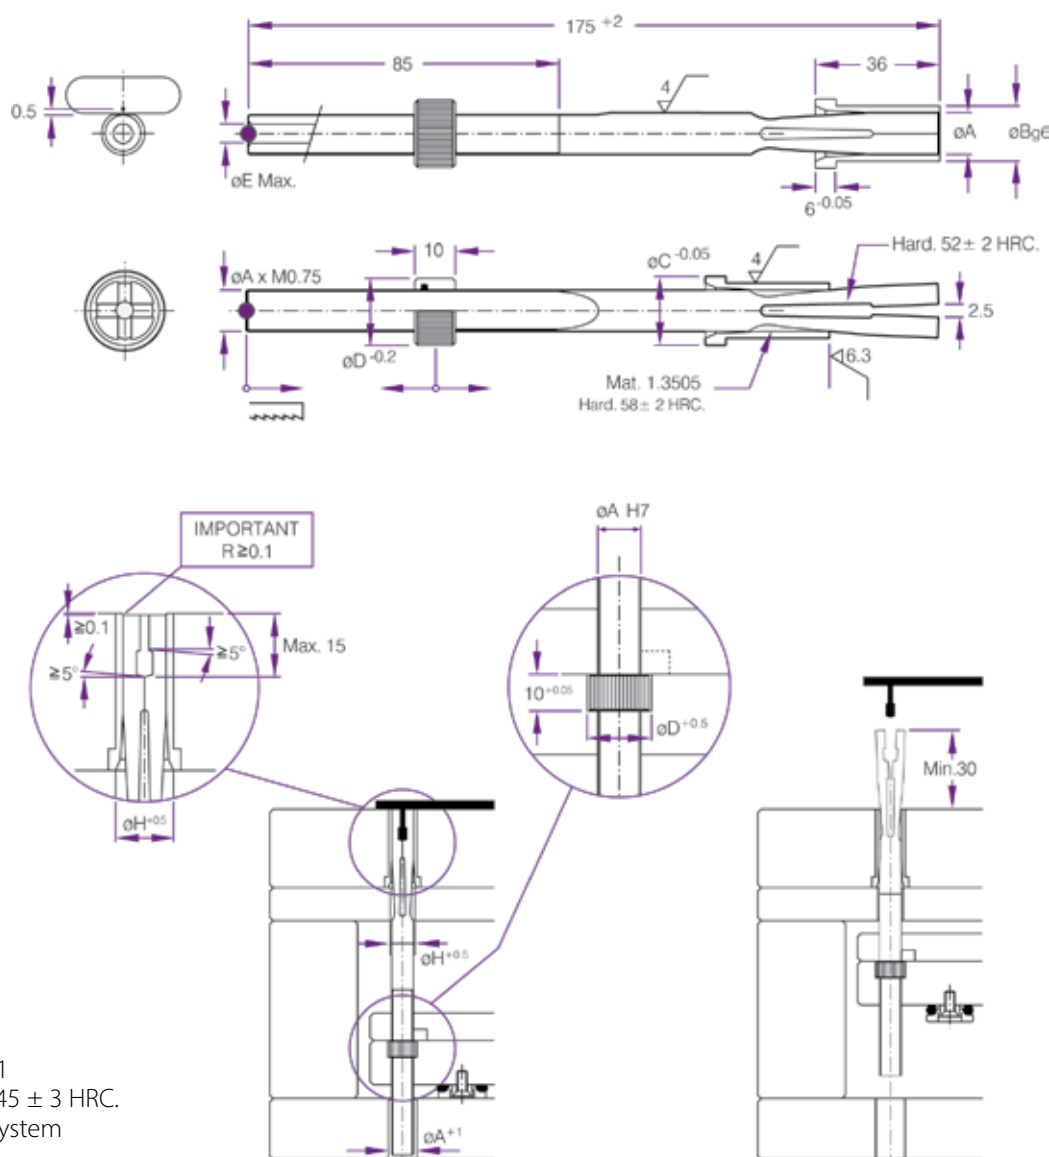

Mat.: 1.2101  
Hardened  $45 \pm 3$  HRC.  
Patented System

Four separate movements in one component. Minimum space required for installation, only needs the space of an ejector. No milling, grinding or hardening other than the machining of detail needed. Cylindrical machining and made 90° regarding the parting line.

Special lengths of 250 and 325mm upon request

| Product Code | A  | B  | C  | D  | E | H  |
|--------------|----|----|----|----|---|----|
| EE.060175    | 6  | 10 | 12 | 12 | - | 9  |
| EE.082175    | 8  | 12 | 14 | 14 | 2 | 11 |
| EE.103175    | 10 | 14 | 16 | 16 | 3 | 13 |
| EE.124175    | 12 | 16 | 18 | 18 | 4 | 15 |